



KTEB-228-1-TP-PH-SL

T5 ELECTRONIC FLUORESCENT



RoHS
Compliant



PRODUCT FEATURES


STARTING METHOD: Preheat Rapid	INPUT VOLTAGE: 120VAC $\pm 10\%$	WARRANTY: 3 Years
LAMP CONNECTION: Parallel	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: Normal

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Lamp end-of-life protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F28T5	2	56.0	0.83	0.56	1.42	0.86	1.54	130	F2-19
F21T5	2	46.0	0.70	0.55	1.43	0.95	2.07	130	F2-19
F14T5	2	38.0	0.59	0.54	1.51	1.14	3.00	130	F2-19

WIRING DIAGRAMS

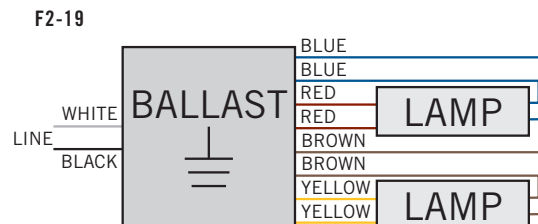




KTEB-228-1-TP-PH-SL

T5 ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

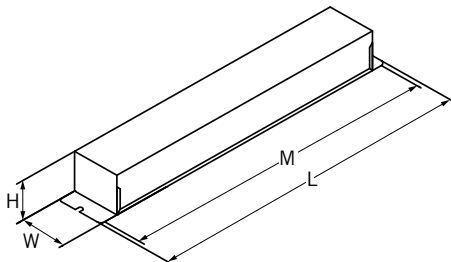

CASE DIMENSIONS


LENGTH: 9.06"
WIDTH: 0.93"
HEIGHT: 0.94"
MOUNTING: 8.75"
UNIT WEIGHT: 0.78 lbs

STANDARD LEAD LENGTHS*

BLACK: 20.00"
WHITE: 20.00"
BLUE: 48.00" X 48.00"
RED: 24.00" X 24.00"
BROWN: 48.00" X 48.00"
YELLOW: 24.00" X 24.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

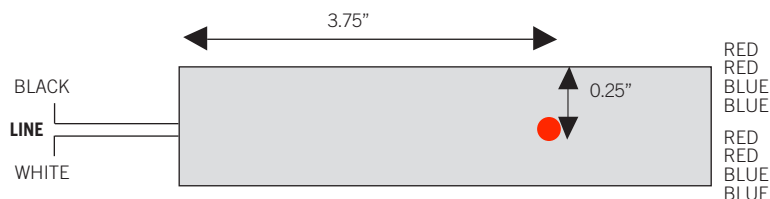

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-228-1-TP-PH-SL-CP	Carton	50	Active

CATALOG NUMBER BREAKDOWN

KTEB-228-1-TP-PH-SL

Keystone Technologies
Electronic Ballast

2 28
Lamps Watts

120V
Input Thermally
Protected

Preheat

Slim Case
Style