




KTET-75-1-SCP-DIM-HV-AL

LOW VOLTAGE TRANSFORMER

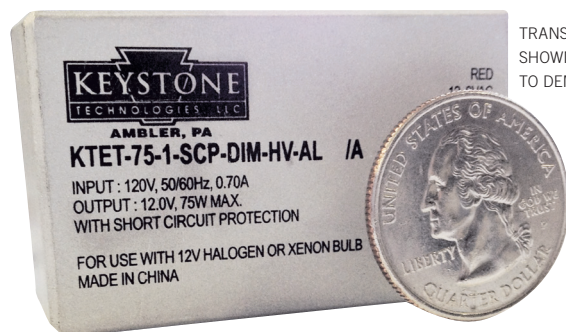

TRANSFORMER
SHOWN WITH QUARTER
TO DEMONSTRATE SCALE



PRODUCT FEATURES

- Dimmable: Smooth, continuous dimming with basic TRIAC dimmers (Phase Controlled – Reverse or Forward Phase).
- Automatic Short Circuit Protection: Shuts down automatically when a fault is detected and will restart once the proper conditions are restored.
- Silent Operation
- Moisture Resistant with Internal Epoxy Filling
- UL Recognized
- 3W Minimum to 75 W Maximum
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Transient Protection meets ANSI/IEEE C62.41 Cat A.

LAMP TYPE: 12V Halogen


LAMP CONNECTION: Parallel

WARRANTY: 3 Years

ELECTRICAL SPECIFICATIONS

Input Watts	Input Current	Input Frequency	Output Voltage	Power Factor
70W	0.59A	60Hz	12V	0.97

WIRING DIAGRAM

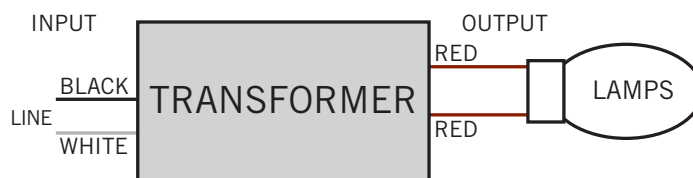




KTET-75-1-SCP-DIM-HV-AL

LOW VOLTAGE TRANSFORMER

CASE STYLE/DIMENSIONS

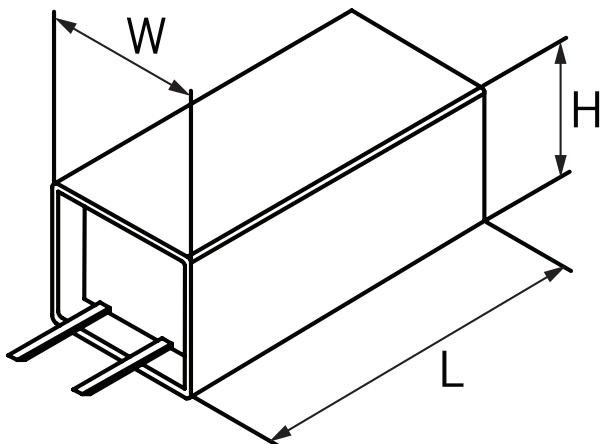

CASE DIMENSIONS

LENGTH: 2.09"
WIDTH: 1.30"
HEIGHT: 0.79"

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTET-75-1-SCP-DIM-HV-AL-DP	Distributor Pack	10	Active

CATALOG NUMBER BREAKDOWN

KTET-75-1-SCP-DIM-HV-AL						
Keystone Technologies Electronic Transformers	Max. Wattage	120V Input Voltage	Short Circuit Protection	Dimmable	12.0V Output Voltage	Aluminum Case