



KTLD-80-1-24V	
Transformer Type	Electronic (Class 2)
Loading	LED
Input Voltage	120Vac ± 10%
Input Frequency	50 / 60Hz

ELECTRICAL SPECIFICATIONS:

Input	Rated Power	92W
	Max. Current	0.86A
	Power factor	>0.9
Output	Max. Power	80W
	Max. Current	3.3A
	Min. Current	0A
	Voltage	24V

FEATURES:

- Meets FCC 47 CFR Part 15 Class B (Consumer) limit
- With Over Current and Short Circuit Protection
- 3-Year Warranty
- Type 1 Outdoor, suitable for dry and damp location


APPROVALS:

- UL 879, UL8750 recognized component LED power unit and signage application


PHYSICAL DIMENSIONS:

Length (L):	9.50"	
Width (W):	1.70"	
Height (H):	1.18"	
Mounting (M):	8.90"	
Metal case		
White, Black, Red, Blue		12"

WIRING DIAGRAM:

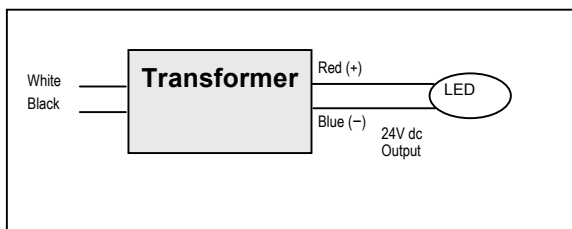


HOTTEST SPOT LOCATION:

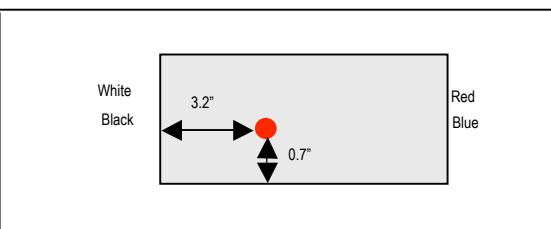

KEYSTONE TECHNOLOGIES, LLC


P.O. Box 246, Ambler PA 19002 • Toll Free: 800-464-2680 • Phone: 215-283-2600
Fax: 215-628-4412 • Email: info@keystoneballast.com

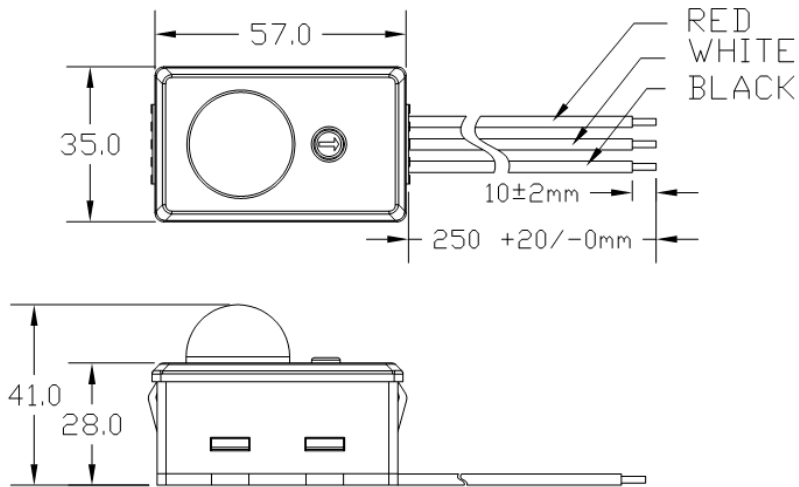

INSTALLATION

Sensor can be directly snapped into the fixture panel punch-out with dimension: 55mm x 33mm. Typical panel thickness: 0.8mm and depth: 25mm. Mounting height: 8ft high for optimized field-of-view (20ft/6.1m diameter)

WIRING DIAGRAM

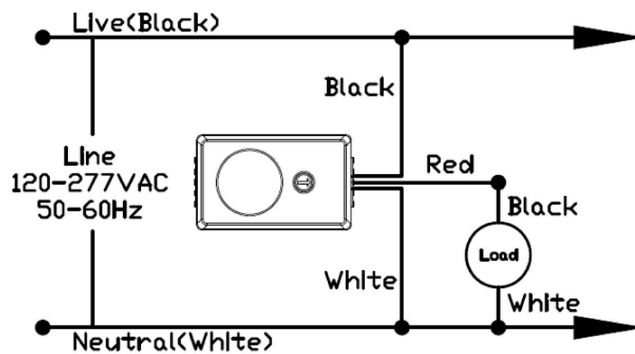

PACKING CONTENT

- Sensor unit with 250mm wires
- Installation instruction