



PRODUCT FEATURES


STARTING METHOD: Program	INPUT VOLTAGE: 120-277VAC $\pm 10\%$	WARRANTY: 5 Years
LAMP CONNECTION: Parallel	INPUT FREQUENCY: 50/60Hz	POWER FACTOR: High

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class A) Non-Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: > 40kHz

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F32T8 32W	1	120	31.0	0.27	0.99	<1.70	0.88	2.84	<10	F1-7
		277	31.0	0.12	0.98	<1.70	0.88	2.84	<10	F1-7
F32T8 30W	1	120	30.0	0.25	0.99	<1.70	0.88	2.93	<10	F1-7
		277	30.0	0.12	0.97	<1.70	0.88	2.93	<10	F1-7
F32T8 28W	1	120	29.0	0.24	0.99	<1.70	0.88	3.03	<10	F1-7
		277	29.0	0.11	0.97	<1.70	0.89	3.03	<10	F1-7
F32T8 25W	1	120	26.0	0.23	0.98	<1.70	0.88	3.38	<10	F1-7
		277	27.0	0.10	0.96	<1.70	0.88	3.26	<10	F1-7
F25T8 25W	1	120	26.0	0.22	0.98	<1.70	0.88	3.38	<10	F1-7
		277	27.0	0.10	0.96	<1.70	0.88	3.26	<10	F1-7
F17T8 17W	1	120	20.0	0.17	0.98	<1.70	0.88	4.40	<10	F1-7
		277	20.0	0.08	0.95	<1.70	0.88	4.40	<10	F1-7

WIRING DIAGRAMS

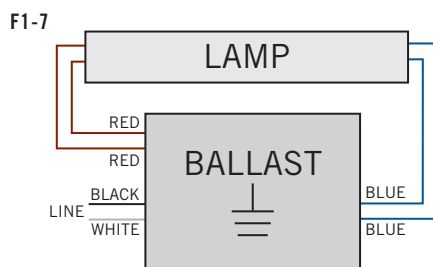


Program Start T8 ballasts require the use of NON-shunted lampholders/sockets.



KTEB-132-UV-PS-N-P

T8 ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

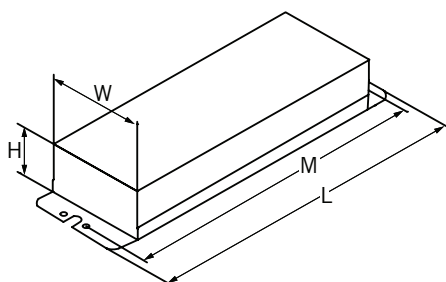

CASE DIMENSIONS


LENGTH: 9.50"
WIDTH: 1.38"
HEIGHT: 1.18"
MOUNTING: 8.90"
UNIT WEIGHT: 1.14 lbs

STANDARD LEAD LENGTHS*

BLACK: 25.00"
WHITE: 25.00"
BLUE: 31.00" x 31.00"
RED: 48.00" x 48.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

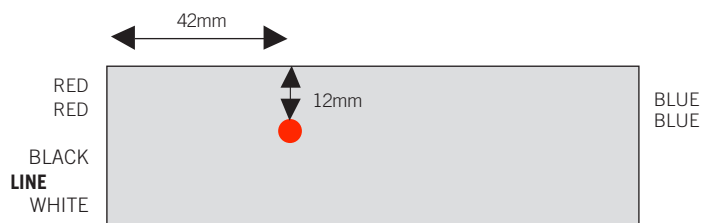

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-132-UV-PS-N-P-CP	Carton	30	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-132-UV-PS-N-P

Keystone Technologies Electronic Ballast	1 Lamp	32 Watts	Universal Voltage Input (120-277V)	Program Start	Normal Light Output	NEMA Premium
---	-----------	-------------	--	------------------	---------------------------	-----------------