



PRODUCT FEATURES


STARTING METHOD: Rapid	INPUT VOLTAGE: 120VAC $\pm 10\%$	WARRANTY: 3 Years
LAMP CONNECTION: Parallel	INPUT FREQUENCY: 60Hz	POWER FACTOR: Normal

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz
- Lamp end-of-life protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
FC8T9 + FC12T9	2	120	39.0	0.60	0.54	1.46	0.76	1.95	150	C2-1
FC12T9 + FC16T9	2	120	49.0	0.73	0.56	1.68	0.70	1.43	150	C2-1

WIRING DIAGRAMS

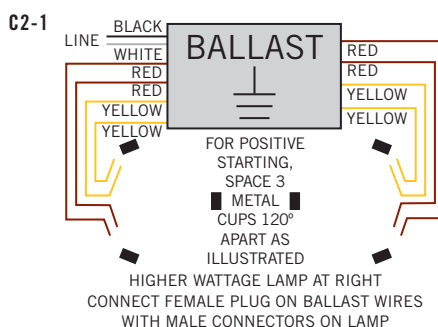




KTEB-2C72-1-TP-WS

CIRCLINE ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

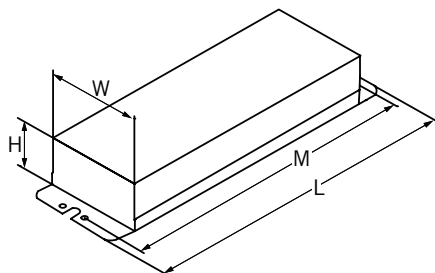

CASE DIMENSIONS


LENGTH: 6.46"
WIDTH: 1.89"
HEIGHT: 1.00"
MOUNTING: 6.00"
UNIT WEIGHT: 0.80 lbs

STANDARD LEAD LENGTHS*

BLACK: 12.00"
WHITE: 12.00"
BLUE: 9.00" X 9.00" X 9.00" X 9.00"
RED: 9.00" X 9.00" X 9.00" X 9.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

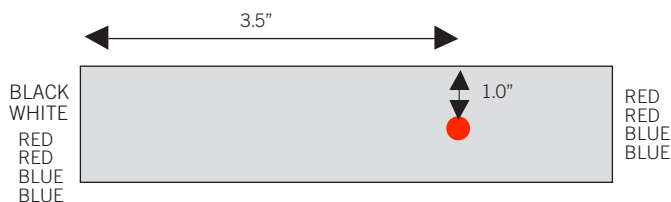

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-2C72-1-TP-WS-CP	Carton	50	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-2C72-1-TP-WS

Keystone Technologies
Electronic Ballast

2
Lamp

Circline

72
Watts

120V
Input

Thermally
Protected

With Circline
Socket