




KTEB-140-1-TP-EMI-WS

CIRCLINE ELECTRONIC FLUORESCENT

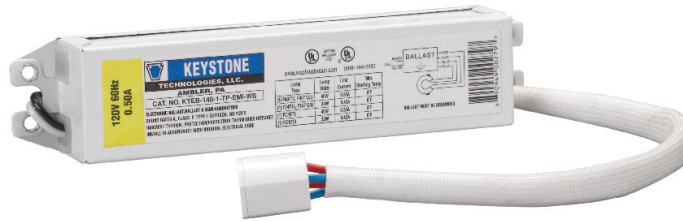

RoHS
Compliant



PRODUCT FEATURES


STARTING METHOD: Rapid	INPUT VOLTAGE: 120VAC $\pm 10\%$	WARRANTY: 3 Years
LAMP CONNECTION: --	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: Normal

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Lamp end-of-life protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
FC16T9 (40W)	1	120	37.5	0.53	0.58	1.41	0.95	2.53	150	C1-1
FC12T9 (32W)	1	120	29.0	0.42	0.57	1.40	0.92	3.17	150	C1-1

WIRING DIAGRAMS

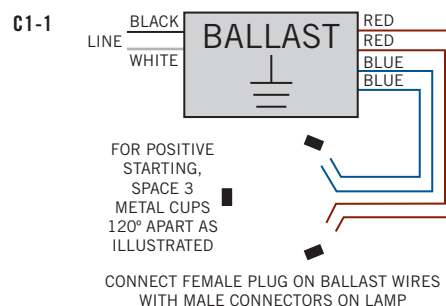




KTEB-140-1-TP-EMI-WS

CIRCLINE ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

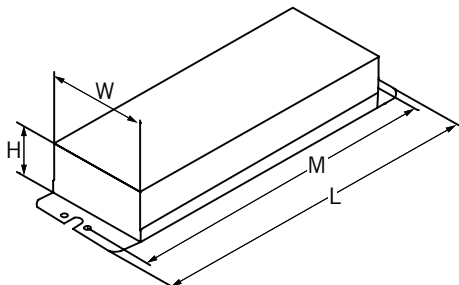

CASE DIMENSIONS


LENGTH: 6.46"
WIDTH: 1.32"
HEIGHT: 1.00"
MOUNTING: 6.00"
UNIT WEIGHT: 0.60 lbs

STANDARD LEAD LENGTHS*

BLACK: 12.00"
WHITE: 12.00"
BLUE: 9.00" X 9.00"
RED: 9.00" X 9.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

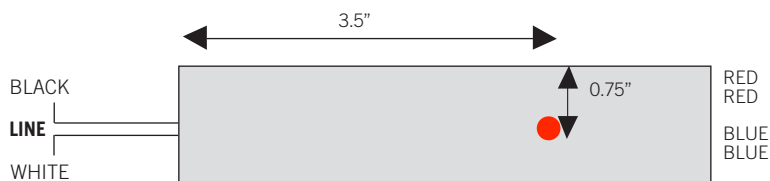

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-140-1-TP-EMI-WS-CP	Carton	20	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-140-1-TP-EMI-WS

Keystone Technologies Electronic Ballast	1 Lamp	40 Watts	120V Input	Thermally Protected	Meets FCC Class B EMI Requirements	With Circline Socket
---	-----------	-------------	---------------	------------------------	--	-------------------------