



KTEB-240-1-TP	
Ballast Type	Electronic
Starting Method	Rapid Start
Lamp Connection	Parallel
Input Voltage	120Vac $\pm$ 10%
Input Frequency	60Hz / 50Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F40T12	2	57	0.85	0.54	1.54	0.75	1.32	150
F34T12	2	48	0.74	0.54	1.52	0.73	1.52	150
F40T12 (25W Shoplight)	2	56	0.83	0.55	1.56	1.05	1.88	150
F30T12	2	47	0.72	0.55	1.56	0.85	1.81	150
F32T8	2	66	0.96	0.57	1.59	1.05	1.59	150
F25T8	2	51	0.77	0.55	1.54	1.05	2.06	150
CFQ26W/G24q	2	43	0.69	0.52	1.56	0.85	1.98	150
CFTR32W/GX24q	2	61	0.91	0.56	1.57	0.89	1.46	150

PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Lamp end-of-life protected
- 3-Years Warranty


APPROVALS:

- UL, cUL 935 listed


PHYSICAL DIMENSIONS:

Length (L): 6.46"
Width (W): 1.89"
Height (H): 1.00"
Mounting (M): 6.00"


Lead Length:
White, Black 22"
Blue 36"
Red 36"

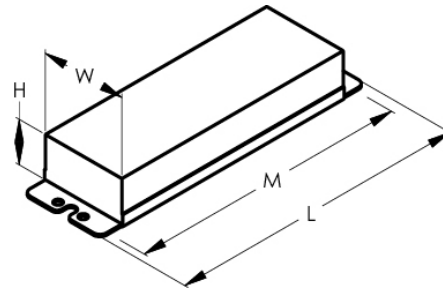

WIRING DIAGRAM:

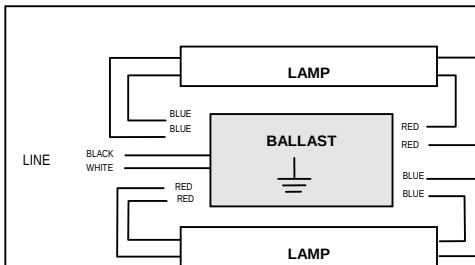

HOT SPOT LOCATION:

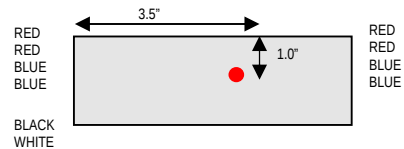

KEYSTONE TECHNOLOGIES LLC.
P.O. Box 246, AMBLER, PENNSYLVANIA 19002
PHONE: 215-283-2600
FAX: 215-628-4412
INFO@KEYSTONEBALLAST.COM
WWW.KEYSTONEBALLAST.COM