



PRODUCT FEATURES




STARTING METHOD: Rapid	INPUT VOLTAGE: 120VAC $\pm 10\%$	WARRANTY: 3 Years
LAMP CONNECTION: Series	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: Normal

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Lamp end-of-life protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F8T5	1	120	8.5	0.13	0.55	1.57	1.0	11.76	130	F1-6
F6T5	1	120	7.3	0.11	0.55	1.50	1.1	15.07	130	F1-6
F4T5	1	120	5.8	0.096	0.51	1.65	1.2	20.67	150	F1-6
F4T5	2	120	8.0	0.12	0.55	1.65	1.0	12.50	130	F2-11
CFT7W/2G7	1	120	7.5	0.12	0.52	1.65	1.05	14.0	150	P1-1
CFT9W/2G7	1	120	8.5	0.13	0.54	1.62	1.0	12.50	130	P1-1

WIRING DIAGRAMS

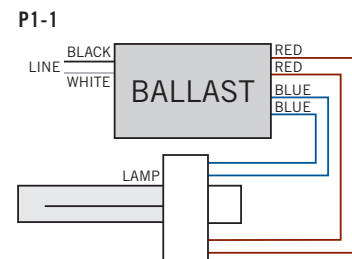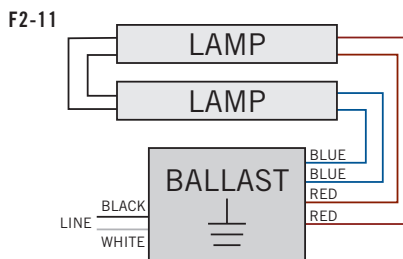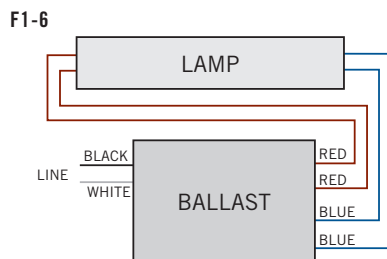




KTEB-108-1-TP-FC

T5 ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

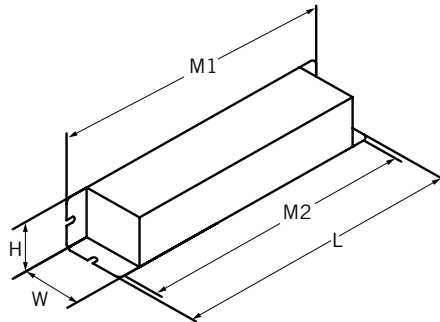

CASE DIMENSIONS


LENGTH: 5.90"
WIDTH: 0.91"
HEIGHT: 0.76"
MOUNTING: 5.60"
UNIT WEIGHT: 0.30 lbs

STANDARD LEAD LENGTHS*

BLACK: 3.00"
WHITE: 3.00"
BLUE: 13.00" X 13.00"
RED: 3.00" X 3.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

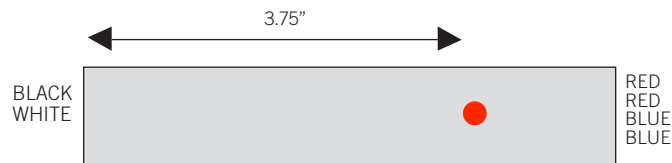

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-108-1-TP-FC-CP	Carton	120	Active

CATALOG NUMBER BREAKDOWN

KTEB-108-1-TP-FC

Keystone Technologies Electronic Ballast	1 Lamp	08 Watts	120V Input	Thermally Protected	Finger Case
---	-----------	-------------	---------------	------------------------	----------------